

Precision Zero Air 1.5 Gas Generator

Application: GC Detector Gas

Part number: 60-1500 (230V) | 60-1501 (110V)




Description

The Precision Zero Air generators are designed specifically to supply clean, dry, hydrocarbon-free air to be used as flame support gas for GC at both standard and trace detection limits.


As with all Precision series generators, Zero Air benefits from a compact and modular, stackable design, minimizing the total footprint required for GC gas supply, and providing flexibility to add or remove modules as your laboratory requirements evolve over time.

- **Gas types** Air
- **Integrated compressor:** No
- **Application Types:** GC Detector Gas

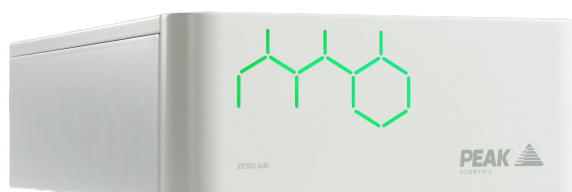

Key Features

- Integrates seamlessly with other Precision units Hydrocarbon content (as Methane) < 0.05ppm for market leading purity
- Minimum lifetime maintenance requirements, no expensive catalyst chamber replacements
- Avoid risk of contaminants entering the system (when switching out empty cylinders)
- No risk of running out of gas in middle of analysis
- Compatible with Precision Air Compressor
- Status indicative lighting feature (amber warm-up, green ready)
- 12 month comprehensive on-site warranty

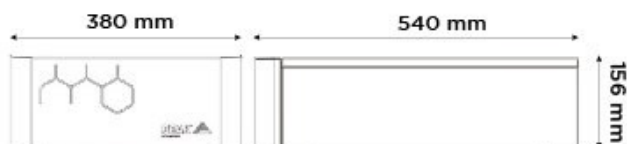

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)77-68-04
Пенза (8412)22-31-16

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Киргизия (996)312-96-26-47

Россия (495)268-04-70

Казахстан (772)734-952-31

<https://peak.nt-rt.ru/> || pki@nt-rt.ru

Technical Specifications	Precision Zero Air 1.5 Gas Generator
Gas Type	Air
Max Gas Flow:	1.5L/min
Max Output Pressure:	80psi/5.5bar
Hydrocarbon Content:	<0.05ppm
Max Output Pressure:	80psi/5.5bar
Gas Outlets Fitting:	1 x 1/4" BSPP
Min Inlet Pressure:	90psi/6.2bar
Max Inlet Pressure:	145psi/10bar
Min Air Inlet Flow:	1.5
Min Inlet Air Quality:	ISO 8753-1:2010 Class 1.4.1 or Precision Air Compressor
Start Up Time:	60 mins
Power Consumption:	220 - 230 W
Voltage:	110 / 230 V
Frequency:	50 / 60 Hz
Current:	1 - 2 A
Heat output:	785
Accreditations:	CE, CSA
Size (HxWxD) mm	156 x 380 x 540 mm
Size (HxWxD) Inches	6.1 x 15 x 21.3 inches
Generator Weight	16kg / 35.2lbs

- Архангельск** (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93
- Киргизия** (996)312-96-26-47

Россия (495)268-04-70

Казахстан (772)734-952-31