

PG14L Purge Gas Generator

Application: FT-IR microscopes Laboratory applications requiring CO2 free air

Part number: 45-1010




Description

The PG14L gas generator from Peak Scientific is suitable for laboratory detectors requiring CO2 free gas such as FT-IR analysis. Using Pressure Swing Adsorption technology to remove organic contaminants and moisture from air, these generators provide a consistent flow of air to ensure little background noise in laboratory analysis.

Requiring minimal maintenance, the PG14L does require an external source of air to operate and can be supported by the Precision Air Compressor.

- **Gas types** Air
- **Integrated compressor:** No
- **Application Types:**
FT-IR microscopes Laboratory applications requiring CO2 free air

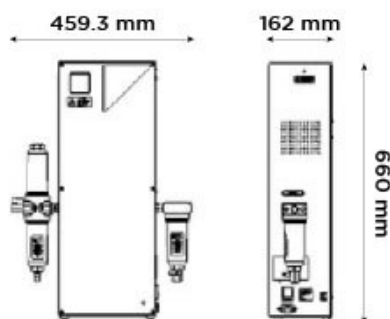

Key Features

- Purge Gas (PG) generators from Peak Scientific produce air which is free of CO2
- Ideal for commercial labs with a high throughput rate of samples
- High performance filters and PSA ensure maximum reduction of moisture (< -70°C dew point).
- Few moving parts means minimum maintenance requirements and 24/7 performance
- Position generator where required, wall mountable for small labs
- More cost effective than any other gas supply as the FT-IR detector needs a constant flow of gas
- Completely silent in operation
- Can be supported by Precision Air Compressor
- 12 month full comprehensive on-site warranty

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Киргизия (996)312-96-26-47

Россия (495)268-04-70

Казахстан (772)734-952-31

<https://peak.nt-rt.ru/> || pki@nt-rt.ru

Technical Specifications

PG14L Purge Gas Generator	
Gas Type	Air
Max Gas Flow:	14L/min
Max Output Pressure:	100psi/6.9bar
Max Output Pressure:	100psi/6.9bar
Max Purity:	<1ppm CO2
Gas Outlets Fitting:	1/4" BSP Female
Min Inlet Pressure:	100psi/6.9bar
Max Inlet Pressure:	120psi/8.3bar
Power Consumption:	240 W
Voltage:	120 - 240 V
Frequency:	50 / 60 Hz
Current:	8 A
Max Operating Temp:	25°C / 77°F
Particles:	< 0.01 µm
Accreditations:	CE
Size (HxWxD) mm	660 x 459 x 162 mm
Size (HxWxD) Inches	26 x 18.1 x 6.4 inches
Generator Weight	14kg / 30.8lbs

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Киргизия (996)312-96-26-47

Россия (495)268-04-70

Казахстан (772)734-952-31

<https://peak.nt-rt.ru/> || pki@nt-rt.ru